



URINAL SUT-6200




Specifications

BRAND	BELLA	PRODUCT TYPE	WALL HUNG SENSOR URINAL
RANGE	PREMIUM	COLOR/FINISH	WHITE
PRODUCT CODE	SUT-6200	MATERIAL	CERAMIC
SIZE	300 X 335 X 690		

Drawing

**SENSOR URINAL WITH OSCILLATING NOZZLE INCLUDE 8867
CERAMIC, DC/AC, BACK INLET AND WALL DRAINAGE**

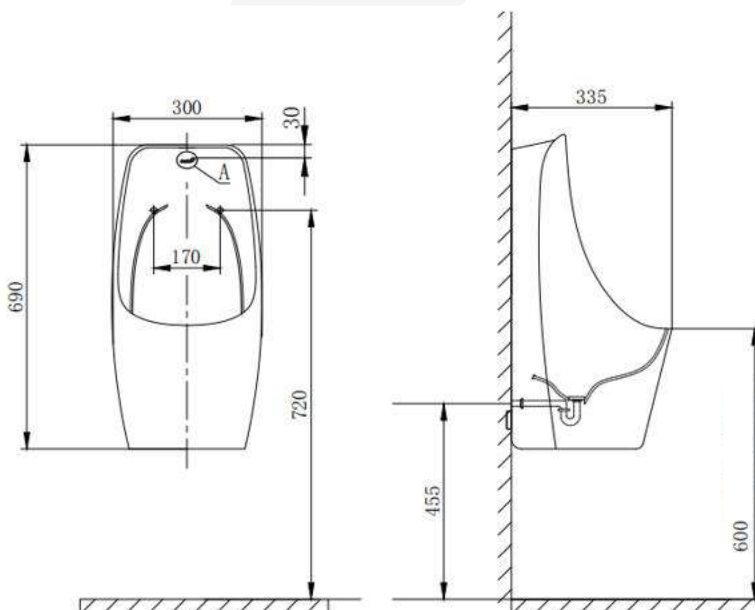


*All dimensions are in mm

BEFORE INSTALLATION

1. Understand all local regulations for reserved water supply pipes and drainage pipes.
2. Please open your product packaging carefully and check whether the product is damaged.
3. Please read the instruction manual carefully to familiarize yourself with the required tools, accessories and installation steps to avoid unnecessary losses.
4. Because ceramic products are easily damaged, be careful when installing and do not tighten the nuts too tightly.
5. After unpacking, please dispose of unnecessary packaging materials as soon as possible, otherwise personal injury may occur due to the random stacking of wooden frames, nails, cardboard and sealing tapes; in addition, do not let children play with the packaging bags, otherwise personal injury may occur.

Note: The relevant information contained in this installation manual is based on the most detailed product conditions at the time of printing. Our company guarantees reserves the right to make changes to product characteristics, packaging and accessories supply without prior notice.

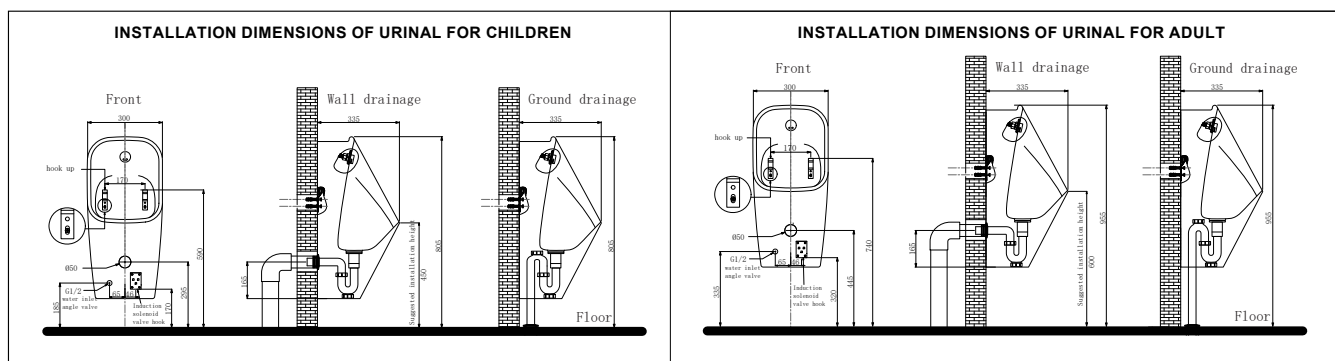

Note: The above line drawings and dimensions are for reference only; the recommended dimensions are for installation only, please make corresponding adjustments according to the installation site conditions

INSTALLATION STEP

1. First use a screw to fix the hook through the long hole on the hook at the corresponding position marked on the drawing.
2. Install the flushing solenoid valve according to the position marked on the dimensional drawing.
3. Hang the urinal on the hook and check whether the drain outlet of the urinal is aligned with the drain pipe. If not, you can use a hammer to adjust it. After adjusting the hook position, use another screw to fix the hook firmly.
4. Install the spray head and sealing ring, connect the spray head and solenoid valve with a hose and connect the sensor.
5. Hang the urinal with installed accessories on the wall and then connect it to the sewage pipe, solenoid valve and water inlet angle valve.
6. Apply glass glue along the periphery of the sewage pipe and the urinal.

Note: It is absolutely prohibited to use epoxy resin glue or sealing materials that become larger after hardening, and our company will not be responsible for any losses caused by this.

MAINTENANCE TIPS

1. It is recommended to clean with detergent every week to prevent mineral accumulation.
2. The detergents used for cleaning and maintaining products should comply with national standards. Do not use acidic, alkaline or abrasive detergents. Abrasive cleaners may damage the surface of the product.
3. Avoid direct impact of hard objects on the surface of the product to prevent product damage.

Rated voltage	: DC: 6V, AC: 100-240V	Post-flush function	: 5.6s
Rated frequency	: 50/60Hz	Sensor detection range	: 65±5cm
Power consumption	: 0.14w (AC), 0.093w (DC)	Ceramic dimension	: 300*335*690mm
Flush volume	: 0.8-0.9L (under dynamic 0.1Mpa)		
Pre-flush function	: 2.6s		