



GLASS STAND TANK


309




Specifications

BRAND	BELLA	PRODUCT TYPE	GLASS STAND TANK
RANGE	PREMIUM	COLOR/FINISH	WHITE, BLACK
PRODUCT CODE	309	MATERIAL	TEMPER GLASS
MOUNTING TYPE	FLOOR WALL FIXED	FRAME	ALUMINIUM
FLUSHING	PNEUMATIC FLUSH	SIZE	483 X 94 X 1000

Drawing

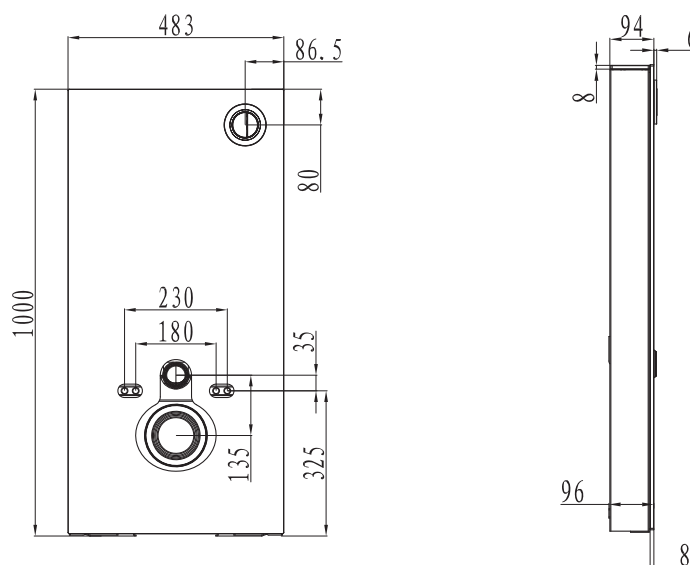

*All dimensions are in mm

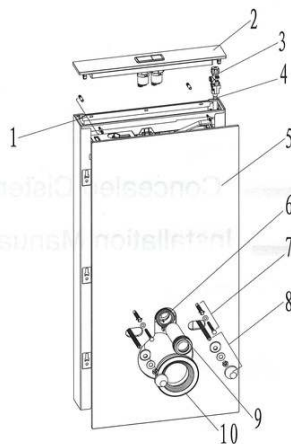

List of main installation accessories


No.	Description	Qty	Function
1	Expansion fixing screw	2	Fixation of concealed cistern
2	Plate	1	Activating flushing
3	Angle valve	1	Fill valve inlet and shut-off
4	Water supply pipe	1	Connecting angle valve to supply water to cistern
5	Glass plate	1	For easy installation and disassembly of internal angle screw
6	Connecting tube	1	Water inlet to ceramic bowl
7	Angle expansion screw	2	Fixation of concealed cistern (Main force-bearing screw)
8	Connecting screw	2	To mount ceramic bowl
9	Flushing piping	1	Connecting toilet and cistern(can be cut according to the depth of toilet water filling hole)
10	Connecting pipe	1	To joint drain pipe into ceramic bowl (Can be cut according to the depth of toilet flushing hole)

Important instruction:

1. Please adhere to the following installation instructions. We shall not be responsible for failures and loss that are contributed to improper installation.
2. This cistern contains glass products, glass is fragile, please pay attention to avoid collision, drop, etc. during installation. Our company will not be held liable for damage caused by glass breakage due to improper installation operations or irresistible factors.
3. The installation position, water supply angle valve position, and sewage outlet position before installation.
4. The instructions have been composed based in the latest product specifications. We reserve the right to make modifications to the packaging and specifications without providing prior notification.

NOTES:


1. Please install this product after tiling
2. All size unit in MM.
3. Follow the material product, should there is an unconformity with drawing.
4. The following products with different buttons have the same installation method.

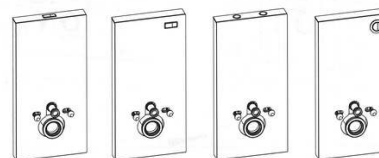

1. General dimension and water supply drawing:


Water filling method:

Water fills from hose at back(connect angle valve on the wall with the hose attached to this cistern).





2. Drill the holes and insert the expansion bolt

★Tip: The size of the drilling position should be determined according to the actual installation position of cistern during installation.

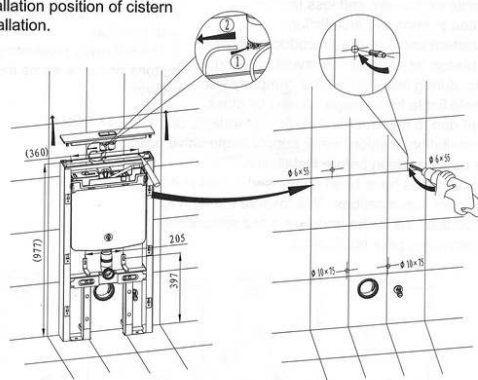


3. Installation of cistern

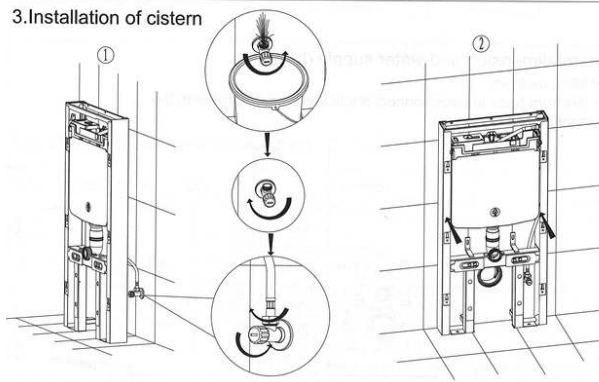

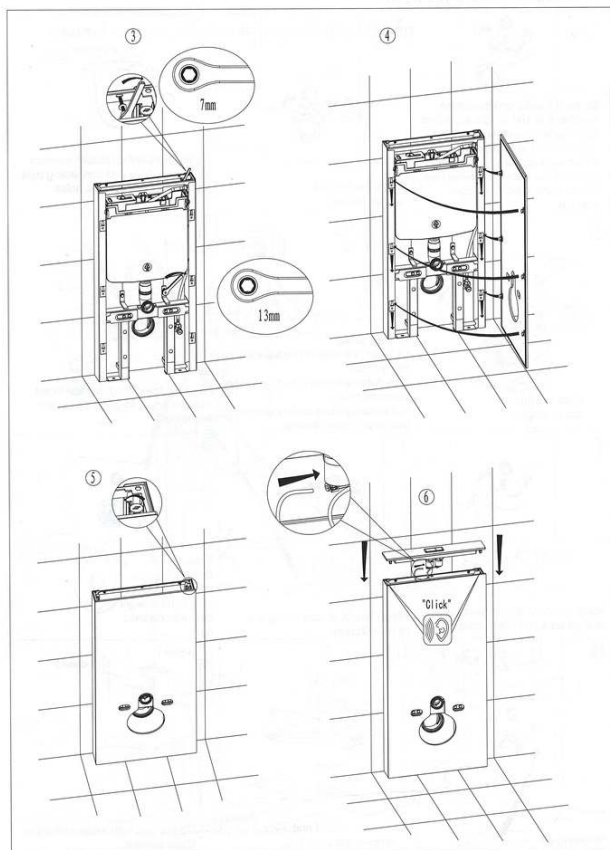


- 4 -

4. Mounting of ceramic bowl

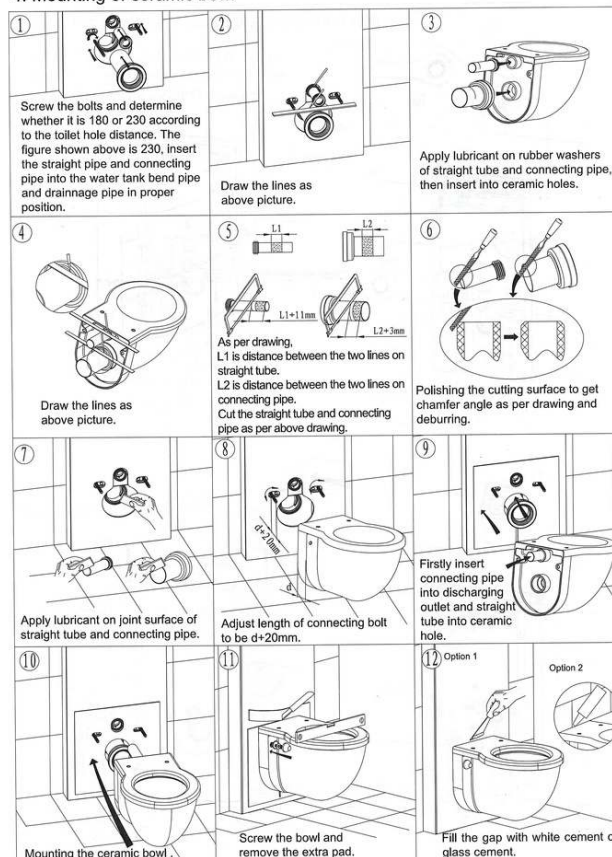

5. Internal flushing mechanism assembly drawing

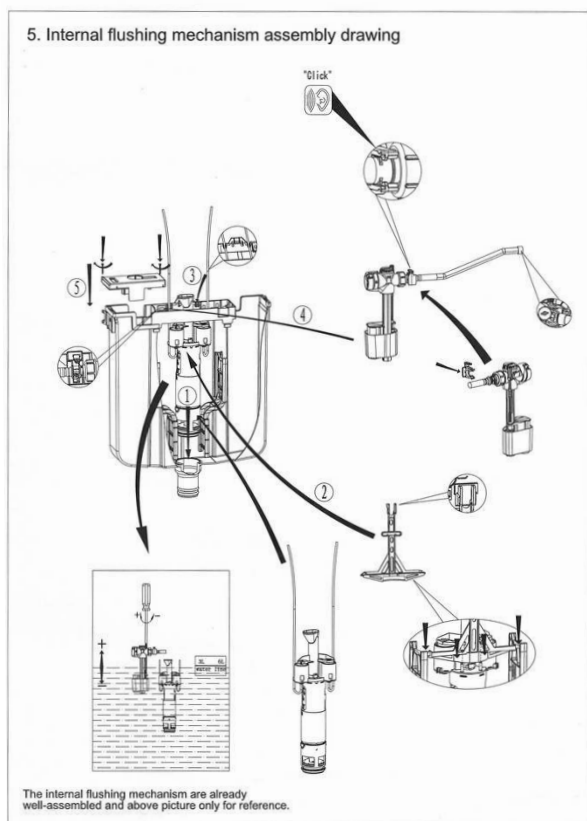

- 6 -